

COM-485

Serial communication module IEX - RS485



Model number:	COM-485
Mounting:	DIN rail


Features

- IEX-2 protocol converter
- RS-485
- galvanically isolated

Technical specification

Power supply	24V (18..28V), 40mA
Galvanic isolation	1kV between internal circuit and com port
Operating conditions	0..50°C, 0..85% rh non-condensing
Degree of protection	IP20
Weight	120g
Level of ambient pollution	2
Standards	EN 61010-1, EN 61010-2-201, EN 61131-2

Terminals

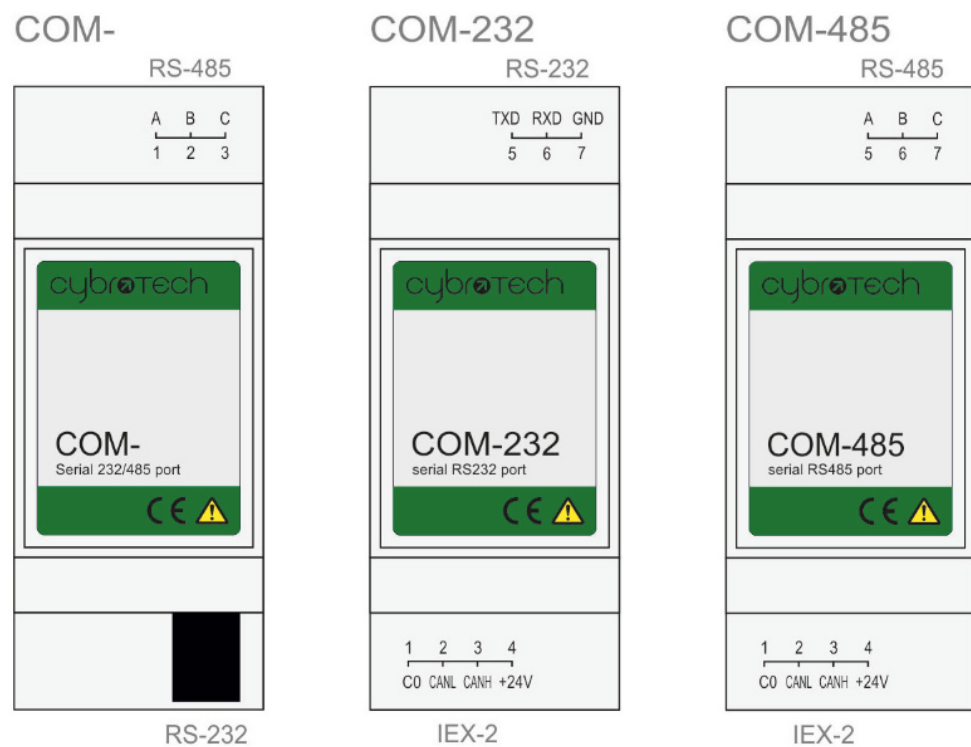

IEX-2 RS-232 RS-485	RJ9 left+right RJ9 terminals	terminals terminals -	terminals - terminals
---------------------------	------------------------------------	-----------------------------	-----------------------------

Bus Connection Cable



- The product includes a 2.5 cm RJ9-to-RJ9 bus cable (Order code: CAD-P0) for connection to controllers, allowing the units to be linked together.
- Longer cable versions are available under order codes CAD-Px.

Dimensions

