

Robotina d.o.o. OIC Hrpelje 38 SI-6240 Kozina Slovenia

Single phase power-sensor, CT

1-phase power-sensor, current transformer



| Model number: | | PM1-E-D-CT | |
|--|-------------------------------|------------------------------|--|
| Connect to: | | RDC Charger | |
| | | RS485 power sensor bus A - B | |
| Mounting: | | DIN rail, 1M, 18 mm | |
| Dimensions: | | 18 × 62 × 119 mm | |
| Used for measuring power and energy of | | | |
| 1 | single-phase energy sources | | |
| 1 | single-phase energy consumers | | |

Applications

• Digital multi-function power sensor for single phase networks

Features

- DIN rail mounting with 50A current transformer (1-ph current transformer)
- Compact design in a single module 18mm wide
- Seal-able cover(phase and neutral terminals)

General description


The PM1-E-D-CT series is an advanced single phase energy monitoring solution with built-in configuration push button and LCD data display. Particularly indicated for metering active energy and other power parameters. Housing for DIN-rail mounting, IP51 protection degree.

Technical specifications


| Technical Data | |
|------------------------------|------------------------------|
| Operating Humidity | ≤ 75% |
| Storage Humidity | ≤ 95% |
| Operating Temperature | -20°C - +50°C |
| Storage Temperature | -30°C - +70°C |
| International Standard | IEC 62053-21 |
| Accuracy | Class 1 |
| Mounting | DIN rail (DIN 43880) |
| Sealing | IP51 Indoor |
| Nominal Voltage Input | (Ph+N) 230V AC (176-276V AC) |
| Max Continuous Voltage | 120% of nominal |
| AC Voltage Withstand | 4KV for 1 minute |
| Impulse Voltage Withstand | 6KV-1.2μS |
| Current Input | 0.25-5A(6)A AC RMS |
| Operational Current Range | 0.4% lb-lmax |
| Over current withstand | 20Imax for 0.01s |
| Nominal Input Current Burden | 0.5VA |
| Frequency | 50Hz(±10%) |
| Power Consumption | ≤ 2W/10VA/phase |
| Accuracy | |
| Voltage, Current | 0.5% |
| Frequency | 0.2% of Mid-Frequency |
| Power Factor | 1% of Unity (0.01) |
| Active Power, Apparent Power | \leq 1% of Range Maximum |
| Reactive Power | \leq 1% of Range Maximum |
| Reactive Energy (Varh) | Class 2 |
| Active Energy (Wh) | Class 1 |
| Current transformer | |
| Frequency | 50-60 Hz |
| Rated current | 50 A |

| Accuracy | from 20% to 120% of rated current |
|-------------------------|---|
| Phase angle | less than 2 degrees at 50% of rated current |
| Insulation voltage | 600 VAC |
| Maximum primary voltage | 5000 VAC (insulated conductor) |
| Dielectric strength | 2.5 kV/1mA/1min |
| Operating temperature | -15 to 60°C |
| Operating humidity | < 85 % |
| Case material | PC/UL94-V0 |
| Bobin | PBT |
| Core | Permalloy |
| Internal structure | Ероху |
| Leads | UL 1015, Twisted pair, 22 AWG |
| Modbus | |
| Bus Type | RS485 (Semi-Duplex) |
| Protocol | Modbus RTU |
| Baud Rate | 1200/2400/4800/9600bps |
| Address Range | 1-247 |
| Max. Bus Loading | 64pcs |
| Communication Distance | 1000 Meters |
| Parity | EVEN/ODD/NONE |
| Data Bit | 8 |
| Stop Bit | 1 |

Dimensions

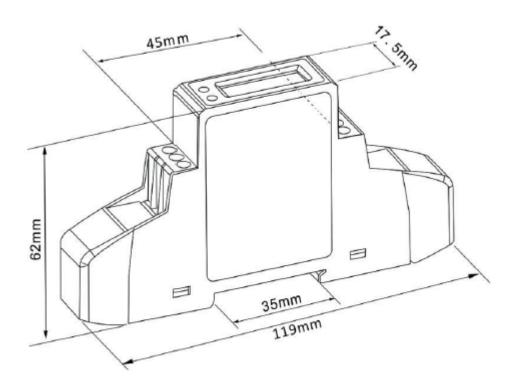

Terminals

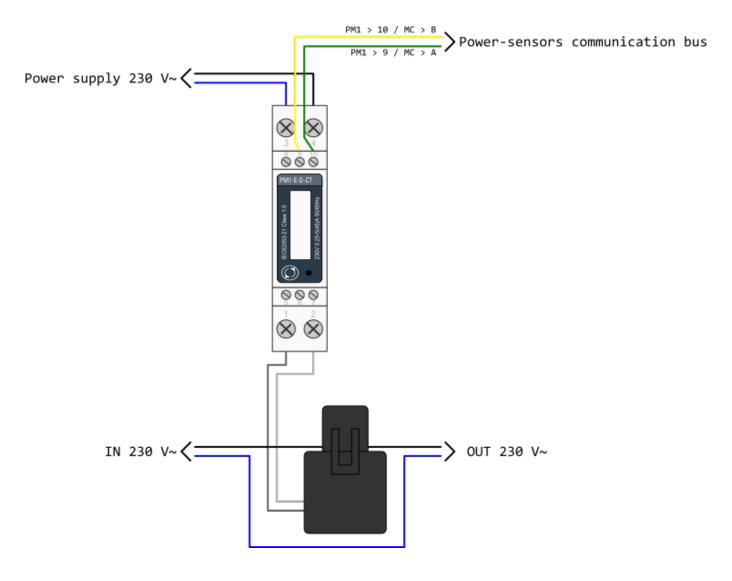

Downloads

hiq_pm1-e-d-ct_user_manual_2020_v1.0.pdf hiq_pm1-e-d-ct_protocol_v1.2.pdf