

HDR-100-24

24V Power supply



Model number:	HDR-100-24
Mounting:	DIN rail, 35mm
Dimensions:	90mm x 54.5mm x 52.5mm

Highlights & Features

- Suitable for parallel operation without extra components
- Ultra slim design with 70mm width
- No load power consumption <0.3W
- Isolation class II
- DC output voltage adjustable
- Over-voltage / Overload / Short circuit Protections


Safety standards

BS EN/EN61000-3-2, IEC62368-1, UL508, UL62368-1, BS EN/EN61558-2-16

Technical specification


Input voltage range	85 - 264 VAC
Output voltage	24 VDC
Output current	3.83 A
Operating temperature	-30°C to +70°C

Terminals

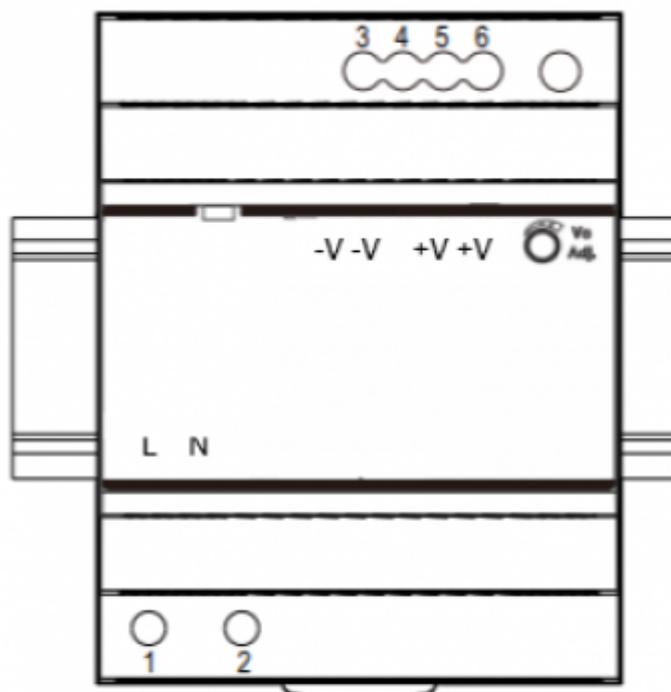

Pin No.	Assignment	Pin No.	Assignment
1	AC/L	3,4	-V
2	AC/N	5,6	+V

Dimensions

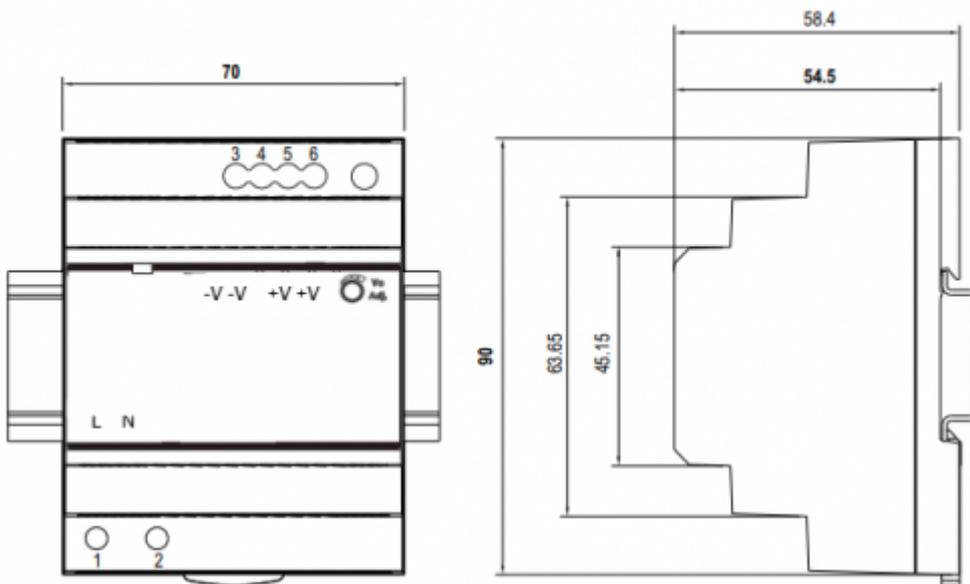

Manufacturer Documentation

[Official manufacturer manual \(PDF\):](#)

mw-hdr10024.pdf