

# HDR-30-24

## 24V Power supply



|               |                      |
|---------------|----------------------|
| Model number: | <b>HDR-30-24</b>     |
| Mounting:     | DIN rail, 35mm       |
| Dimensions:   | 90mm x 54.5mm x 35mm |
| Old code:     | PS-30-24             |

## Highlights & Features

- Ultra slim design with 35mm width
- No load power consumption <0.3W
- Isolation class II
- DC output voltage adjustable
- Over-voltage / Overload / Short circuit Protections


## Safety standards

BS EN/EN61000-3-2, IEC62368-1, UL508, UL62368-1, BS EN/EN61558-2-16

Technical specification

|                       |                |
|-----------------------|----------------|
| Input voltage range   | 85 - 264 VAC   |
| Output voltage        | 24 VDC         |
| Output current        | 1.5 A          |
| Operating temperature | -30°C to +70°C |

Terminals

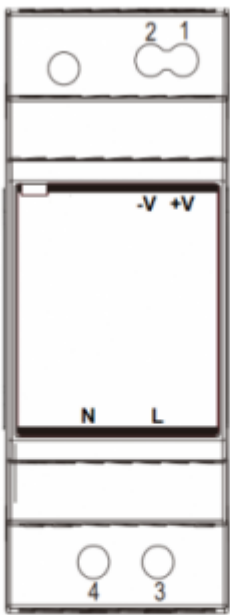

| Pin No. | Assignment | Pin No. | Assignment |
|---------|------------|---------|------------|
| 1       | 24 VDC     | 3       | AC/L       |
| 2       | GND        | 4       | AC/N       |

Dimensions

