

1. HDR-30-24

**** 24V Power supply****



Model number:	HDR-30-24
Mounting:	DIN rail, 35mm
Dimensions:	90mm x 54.5mm x 35mm
Old code:	PS-30-24

1.1. Highlights & Features

- Ultra slim design with 35mm width
- No load power consumption <0.3W
- Isolation class II
- DC output voltage adjustable
- Over-voltage / Overload / Short circuit Protections


1.2. Safety standards

BS EN/EN61000-3-2, IEC62368-1, UL508, UL62368-1, BS EN/EN61558-2-16

1.3. Technical specification

Input voltage range	85 - 264 VAC
Output voltage	24 VDC
Output current	1.5 A
Operating temperature	-30°C to +70°C

1.4. Terminals

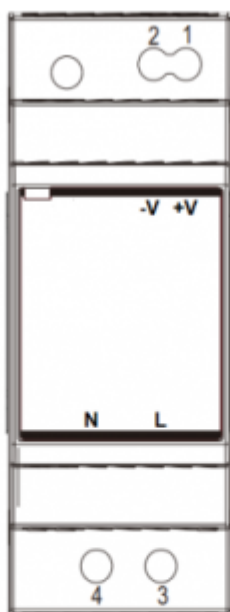

Pin No.	Assignment	Pin No.	Assignment
1	24 VDC	3	AC/L
2	GND	4	AC/N

1.5. Dimensions

