Robotina d.o.o.
OIC Hrpelje 38
SI-6240 Kozina
Slovenia

1. O2-L-IW



Model number:	**O2-IQ**
Mounting:	in-wall, in junction box behind scene buttons
Dimensions:	50×50×15mm

1.1. Applications

- remote lighting circuts
- remote sockets or blinds

1.2. Features

- 2 relay outputs 16 A
- 2 mains sense inputs * configurable button action:


1.3. General description


O2 is in wall compact remote input module. Any kind of push-button design can be used.

1.4. Technical specification

Outputs:	relay 16 A/250 VAC resistive
Power supply:	24V/60mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Standards:	EN 60730-1

1.5. Terminals

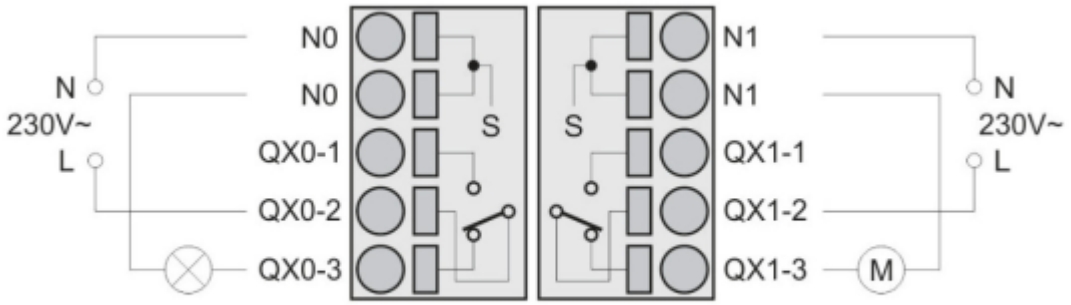

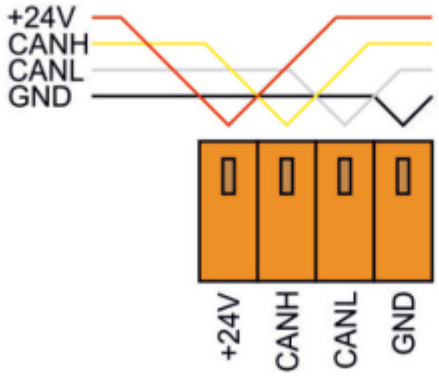

Mains sense is connected to the relay middle contact