Robotina d.o.o.
OIC Hrpelje 38
SI-6240 Kozina
Slovenia

1. SC-4T-IQ

touch screen 4 scene controller




Model number:	**SC-4T-IQ**
Mounting:	on-wall, 3M rectangular box
Dimensions:	122×80×23mm

1.1. Applications

- Scene controller
- Individual light / dimmer button
- Blinds up/down button
- IR remote controller input

1.2. Features

- configurable panel layout

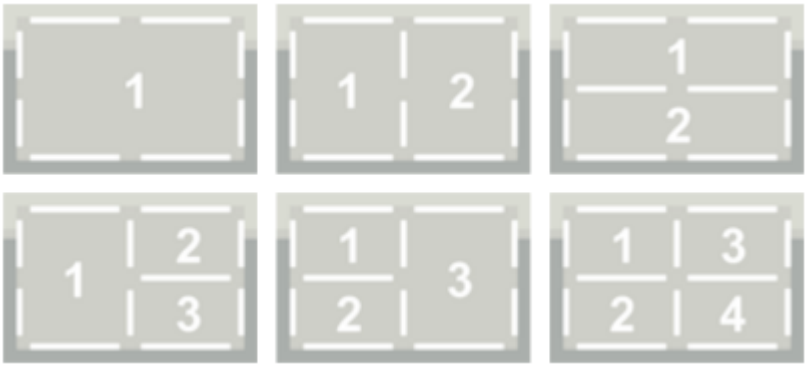

- quick set any lights and/or blinds to predefined value
- easy scene memorization
- configurable button action:
  - on/off
  - dimmer push button (on/off and 0..100%)
  - blinds up/down
  - scene
- IR remote commands receiver

1.3. General description

SC-4T-IQ is on wall compact intelligent scene controller with up to 4 configurable touch buttons. Scene controller provides memorizing and selection of up to 4 scenes. Scene state is indicated by LED. Scene can be any combination of lights and blinds controlled through HIQ modules. SC-4T-IQ buttons can be configured also as toggle button for on/off output, dimmer button or up/down button for blinds control. Built in IR receiver allows scene set with any RC5/36kHz IR remote controller.


1.4. Technical specification

IR remote receiver:	RC5, 36kHZ
Power supply:	24V/25mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c

1.5. Terminals

IEX2 BUS	**+24V**	IEX2 bus
	CANH	
	CANL	
	GND	

Terminals

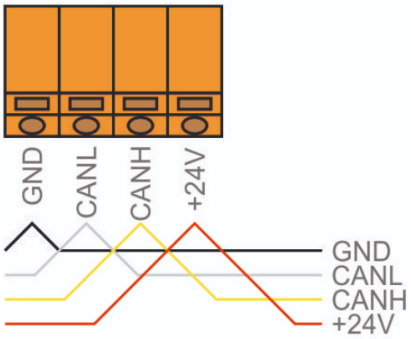

Mounting: rectangular box 3M

