

# TS-S-WH

temperature sensor, iBeacon transmitter, RS485 for graphical touch display



Model number:	<b>TS-S-WH</b>
Mounting:	Field, on wall
Old code:	TS-S-W

## Features


- IEX-2 module
- temperature sensor
- iBeacon transmitter
- RS485 for touch display

## Technical specification


<b>Temperature sensor</b>	
Operating range	0 °C to +50 °C
Measuring error	±0.5°C typ. (0°C to +50°C)
Resolution	0.1°C (12 bit)
Readout	0.1°C (254 equals 25.4°C)
<b>Beacon</b>	
Bluetooth protocol	BLE 5.0
Frequency band	2.4GHz
Broadcast range	5
Advertising interval	500ms

Local name	CYBRO
<b>Touch display</b>	
Protocol	page/event, IEX to serial
Interface	RS485, 115200bps 8n1
Galvanic isolation	none
Cable length	50m
<b>General</b>	
Power supply	24V (18..28V), 50mA
Terminals	push-button cage clamp 3.5mm
Wire diameter	stranded 0.2..1.5mm <sup>2</sup> , solid to 1mm <sup>2</sup>
Cable diameter	8mm max.
Operating conditions	0..50°C, 0..85% rh non-condensing
Storage temperature	-20..75°C
Degree of protection	IP20
Dimensions	80x80x25mm
Weight	100g


## Terminals

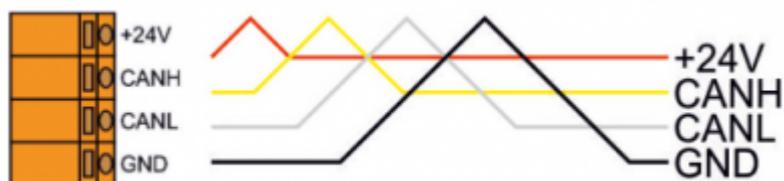

## Typical configuration

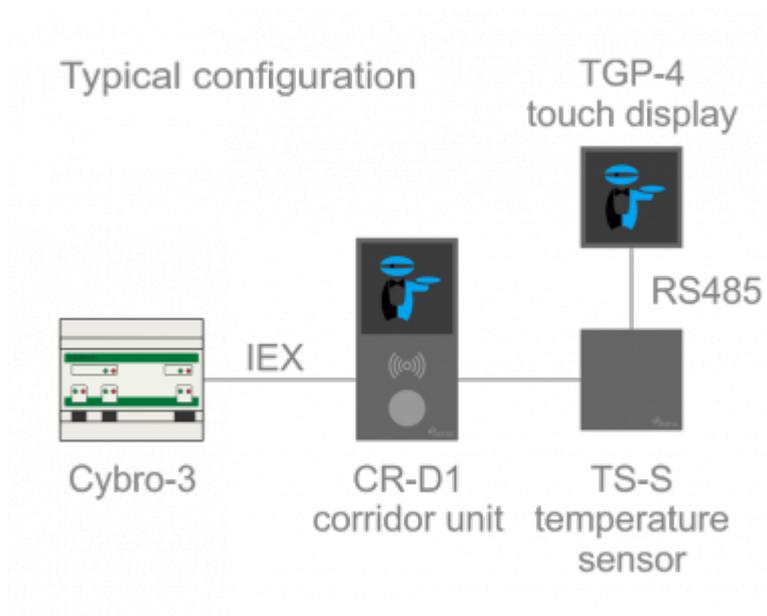

## Dimensions & Mounting

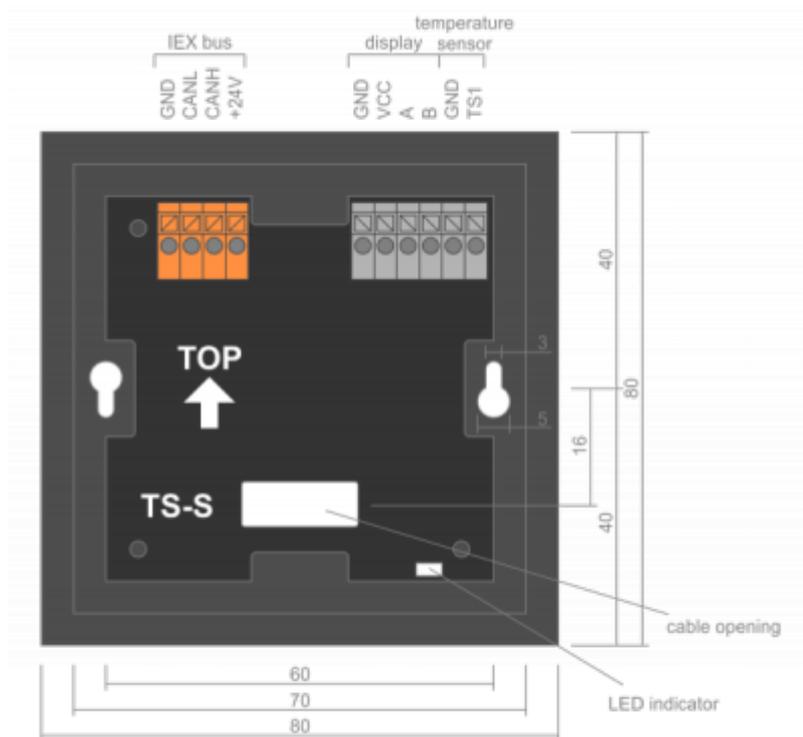

Mounts on the wall or any flat surface.  
 Can be mounted above standard Ø60 dose.  
 Secured with a two 3.5mm screws.