

# Bio-20R

**10 dig inputs, 10 relay 8A outputs**



Model number:	<b>Bio-20R</b>
Mounting:	DIN rail, 6M, 106 mm



## Features

- IEX-2 module

## Technical specification

Input type	dry contact, internal pull-up 12V 2mA
Output type	relay 8A/250VAC or 8A/30VDC resistive
Contact type	normally open
Continuous load	6A each relay 20A all relays (mk1) 12A each relay group (mk2)
Power supply	24V (18..28V), 120mA (30mA+9mA*number of active outputs)
Galvanic isolation	4kV between internal circuit and relay contact
Operating conditions	0..50°C, 0..85% rh non-condensing 36A all relays
Power supply	24V (18..28V), 260mA (20mA+11mA*active outputs+9mA*active inputs)
Weight	300g
Degree of protection	IP20
Level of ambient pollution	2
Standards	EN 60730-1

## Terminals

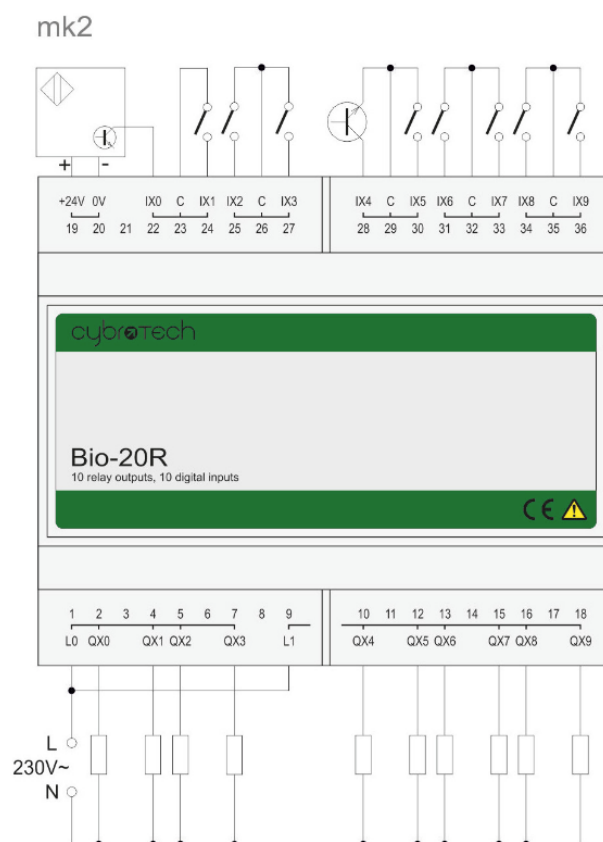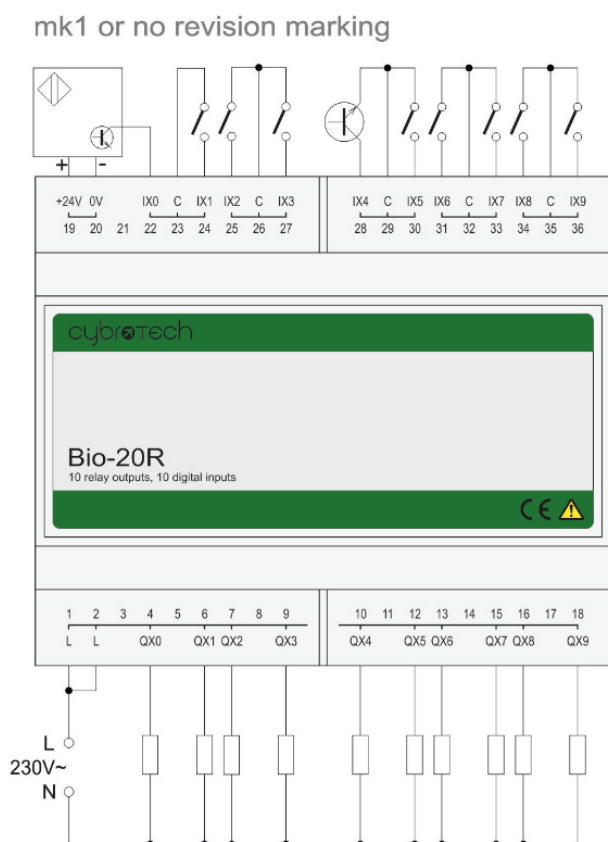

## Dimensions

