

COM

Serial communication module RS232 - RS485

Model number:	COM
Mounting:	DIN rail




Features

- IEX-2 protocol converter
- RS-232 / RS-485
- galvanically isolated

Technical specification

Power supply	24V (18..28V), 40mA
Galvanic isolation	1kV between internal circuit and com port
Operating conditions	0..50°C, 0..85% rh non-condensing
Degree of protection	IP20
Weight	120g
Level of ambient pollution	2
Standards	EN 61010-1, EN 61010-2-201, EN 61131-2

Terminals

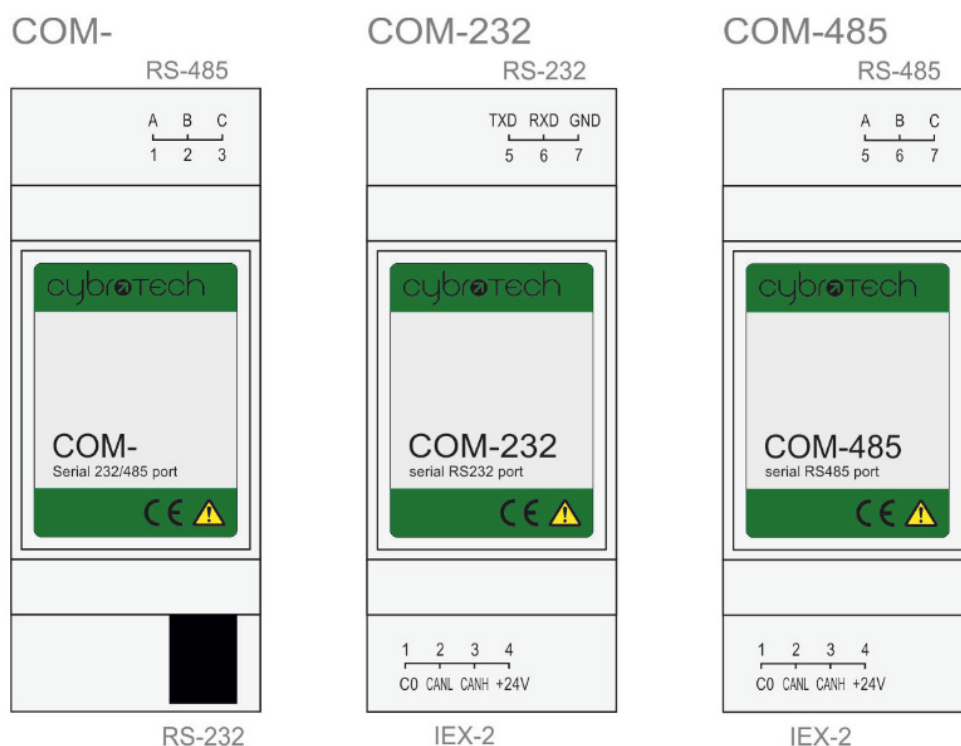

IEX-2	RJ9 left+right	terminals	terminals
RS-232	RJ9	terminals	-
RS-485	terminals	-	terminals

Dimensions

