


## CR-D1

RFID, QR code code readers, iBeacon transmitter, 4" graphical touch display

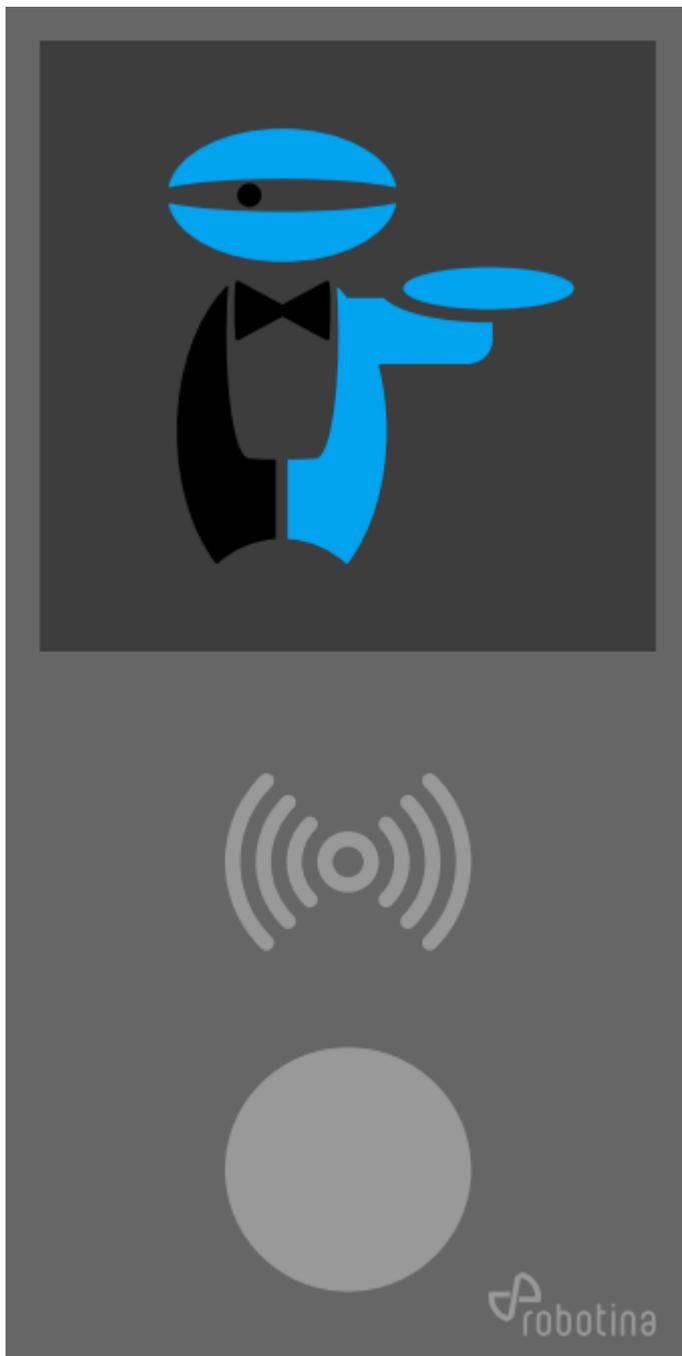

Model number:	<b>CR-D1</b>
Mounting:	Field, on wall

## Features

- touch display 4"
- RFID card reader
- QR code reader
- iBeacon transmitter
- temperature sensor
- digital output for door lock
- digital input for door sensor
- digital input for PIR sensor
- 2 spare digital inputs

## Technical specification

RFID reader
Tag frequency
Reading distance
Output format
QR reader
2D formats
1D formats
Reading distance
Environment light
Decoding time
Optimal QR size
Output format
Beacon
Bluetooth protocol
Frequency band
Broadcast range
Advertising interval
Local name
Touch display
Diagonal
Resolution
Touch panel
Interface
Cable length
.
125kHz
0..5cm
32-bit binary
QR, Data Matrix, PDF417
EAN13, UPCA, UPCE0/1
1.5..15cm
50 lux..100,000 lux

400ms
22x22mm
plain text
BLE 5.0
2.4GHz
5m
500ms
CYBRO
10cm (4")
480x480 TFT
capacitive
RS485 115200 8n1
n/a (D1, D2), 100m (D3)

## Terminals

## Dimensions & Mounting