



RDC Charger

User manual



Robotina d.o.o.
OIC-Hrpelje 38 Hrpelje
SI-6240 Kozina
Slovenia

Table of Contents

HV-375-3P-01	5
<i>Technical specification</i>	5
<i>Dimensions</i>	7
<i>Certificate</i>	7

HV-375-3P-01



Order code:	HV-375-3P-01
Description:	High voltage hybrid inverter-three phase
Mounting:	standing-outdoor IP54

Technical specification

AC output data

Rated output power of AC and UPS (W):	50000
Rated AC Input/Output current [A] :	75.8/72.5
Max AC Input/Output current [A]:	83.4/79.8
Output frequency and voltage:	50/60Hz; 230Vac/400Vac (3 phases)

PV input data

Max DC input power (W):	65000
PV input voltage (V):	1000
Starting voltage (V):	180
PV input current (A):	36+36+36+36


Connected battery input data

Battery voltage range (V):	160-800
Max charging current (A):	50
Max discharging current (A):	50

General technical data

Working temperature (°C):	-40 ~ 60
Communication with BMS:	RS485, CAN
Weight (kg):	80
Degree of protection (IP):	IP65

Dimensions

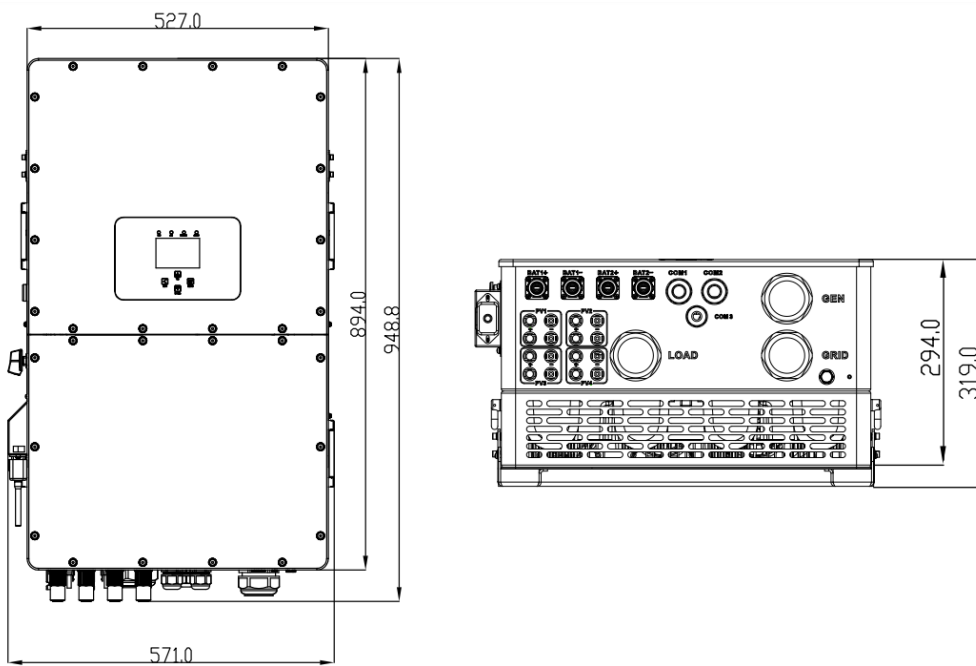

Certificate

[hybridinverter_eudeclaration-sun-29.9-50k-sg01hp3-eu-bm4_231009001.pdf](#)