

# IR-580-IQ

## Passive infrared detector



Model number:	<b>IR-580-IQ</b>
Connects to:	<a href="#">LC-10-IQ</a> inputs
Mounting:	On wall / Ceiling
Dimensions:	100 × 60 × 42 mm

## Applications

- Motion detector
- Ready light motion detector
- Intrusion detector

## Features

- Ceiling / wall mount
- Excellent RFI and EMI protections
- Built-in temperature compensation
- Double noise reduction circuit
- Sealed optics mechanism design
- Disabled blue light walk test LED
- Adjustable range at various height


## General description

IR-580-IQ is a passive infrared detector with sleek and compact housing. It delivers many advanced features and aesthetical appearance required by security professionals. The IR-580 provides typical wide angle detection for general areas.

## Installation instruction

- Do not install the detector at position which faces direct or reflected sunlight or near windows with direct car headlight.
- Ensure that there are no obstructions (plants, screens, furniture etc.) in the field of view that may cause incorrect cover/operation of the detector.
- Avoid locating the detector in areas that contain equipment that may change the environment temperature rapidly (i.e. above radiator or under the air-conditioner)
- Install the detector at proper height on a rigid surface. Do not install the detector on vibrating surface.
- PIR detector is more sensitive to the motions “across” the detection zones than “toward” or “away” the unit.


## Detection pattern

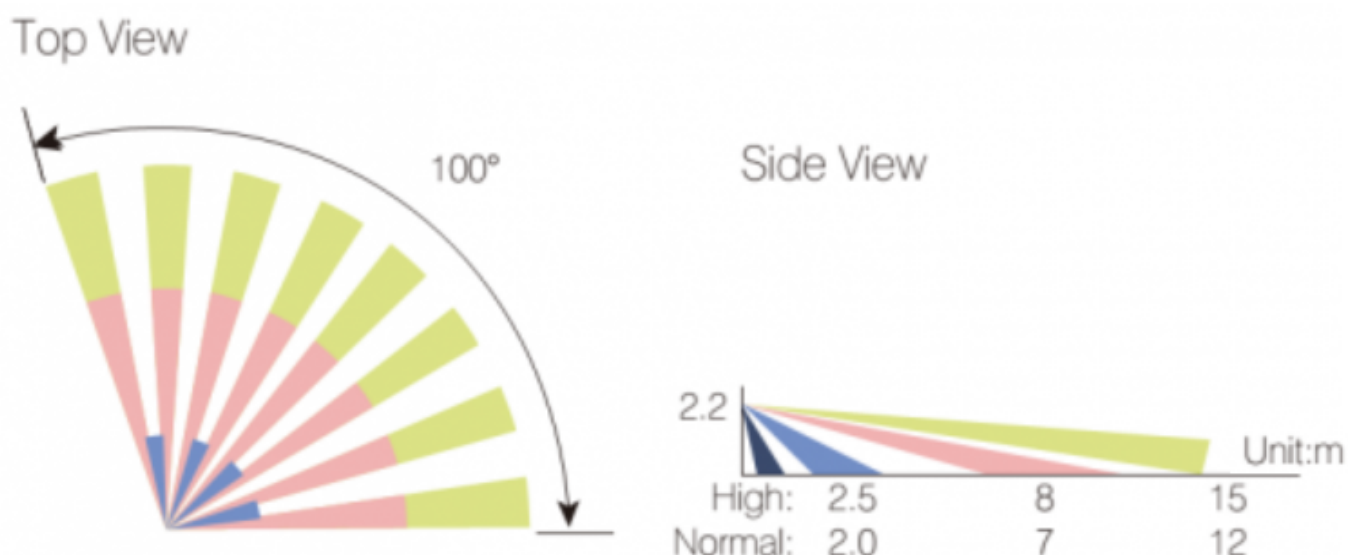

## Range adjustment

M/H	1,8 m	2,0 m	2,2 m	2,4 m	2,6 m	2,8 m	3,0 m
<b>B/P</b>	Maximum detection coverage [m]						
<b>+2</b>	15	15	15	15	15	12	15
<b>+1</b>	15	15	15	15	13	15	15
<b>0</b>	15	15	15	15	15	15	15
<b>-1</b>	14	15	15	15	15	15	15
<b>-2</b>	13	14	14	15	15	15	14
<b>-3</b>	10	11	12	14	13	14	9
<b>-4</b>	8	9	11	11	12	13	8
M/H	Mounting Height						
B/P	PCB Position						

## Ceiling mounting

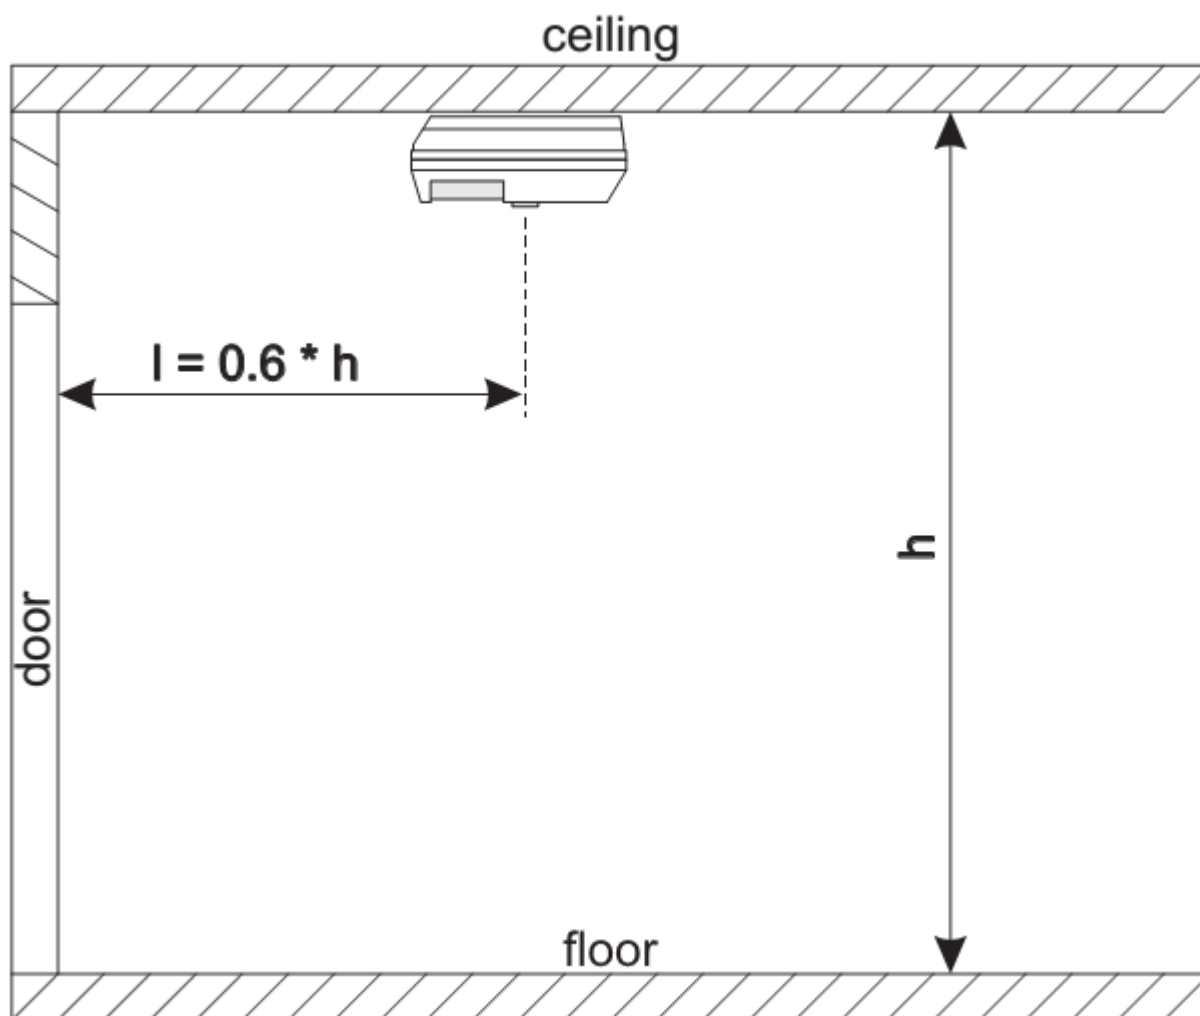

## Technical specifications

Power supply	24 VDC
Current drain	10 mA
Output timer	OFF (no delay)
Output	OC NPN transistor, 10mA, 30V max NC/NO selectable (default:NO)
Detection range	100° wide, 15m @ 25°C (adjustable)
Pulse count	2/3 selectable
LED indication	blue; enabled/disabled selectable (default:disabled)
RFI immunity	Ave. 25 V/m (10 ~ 1000 MHz)
Temperature	-20°C ~ 60°C
Dimensions	100 x 60 x 42mm

## Terminals

Power supply	+	Power supply
	-	



HIQ digital input	<b>AL</b>	Digital output
-------------------	-----------	----------------