



# RDC Charger

## User manual



**Robotina d.o.o.**  
OIC-Hrpelje 38 Hrpelje  
SI-6240 Kozina  
Slovenia




# Table of Contents

|                                      |   |
|--------------------------------------|---|
| <b>xEMS-C-01</b> .....               | 5 |
| <b>Features</b> .....                | 5 |
| <b>Technical specification</b> ..... | 5 |
| <b>Dimensions</b> .....              | 7 |



# xEMS-C-01

**xEMS is a system for efficient energy management in industrial and business facilities**

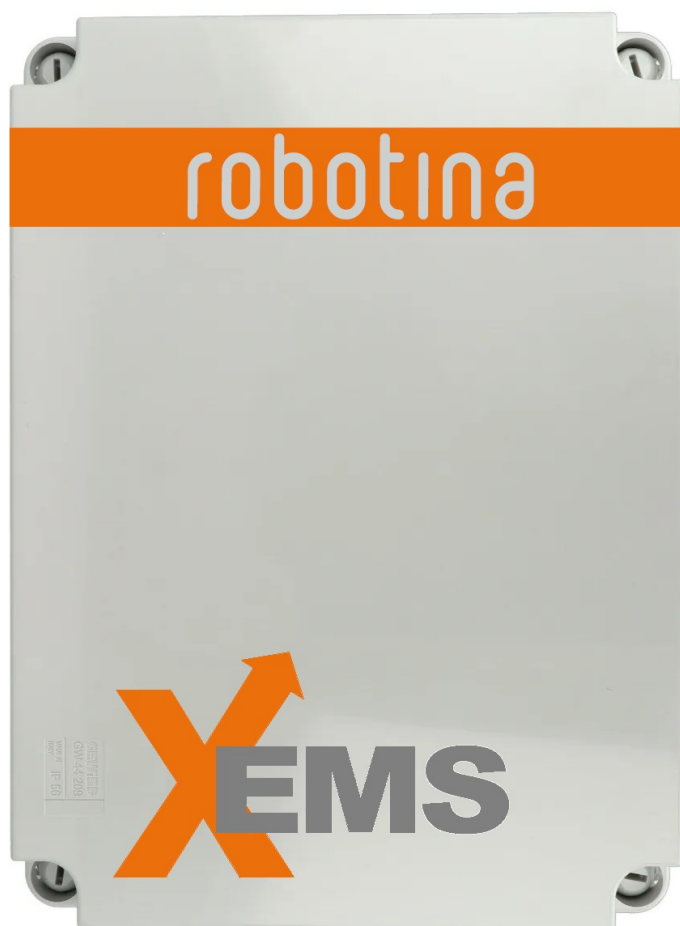

Order code:

**xEMS-C-01**

## Features

Industry grade ESS with high energy and power density, scalability and excellent performance. Integrated EMS with advanced functionality and lifetime strategy upgrades. For residential, Commercial and Utility applications. xEMS provides dynamic energy flow management, peak shaving and other advanced functions.



## Technical specification

|                        |                                   |
|------------------------|-----------------------------------|
| Power supply           | 230 VAC 50Hz                      |
| Communication:         | Ethernet, Modbus, wireless modbus |
| Integration interface: | API, OPC, Modbus, Digital twin    |

|        |        |
|--------|--------|
| Weight | 2,1 kg |
|--------|--------|

## Dimensions

