Robotina d.o.o.
OIC Hrpelje 38
SI-6240 Kozina
Slovenia

1. PS-30-12

BM-GW power supply



Model number:	**PS-60-24**
Mounting:	DIN rail, 52.5mm
Dimensions:	90mm x 54.5mm x 52.5mm

1.1. Highlights & Features

- Suitable for parallel operation without extra components
- Ultra slim design with 52.5mm width
- No load power consumption <0.3W
- Isolation class II
- DC output voltage adjustable
- Over-voltage / Overload / Short circuit Protections


1.2. Safety standards

BS EN/EN61000-3-2, IEC62368-1, UL508, UL62368-1, BS EN/EN61558-2-16

1.3. Technical specification


Input voltage range	85 - 264 VAC
Output voltage	24 VDC
Output current	2.5 A
Operating temperature	-30°C to +70°C

1.4. Terminals

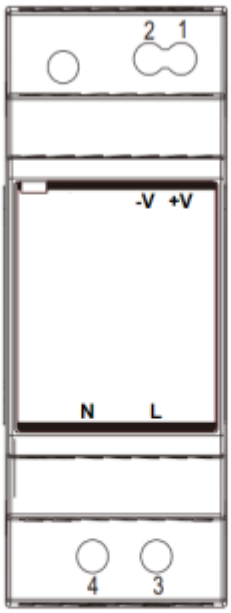

Pin No.	Assignment	Pin No.	Assignment
1	12VDC	3	AC/L
2	GND	4	AC/N

1.5. Dimensions

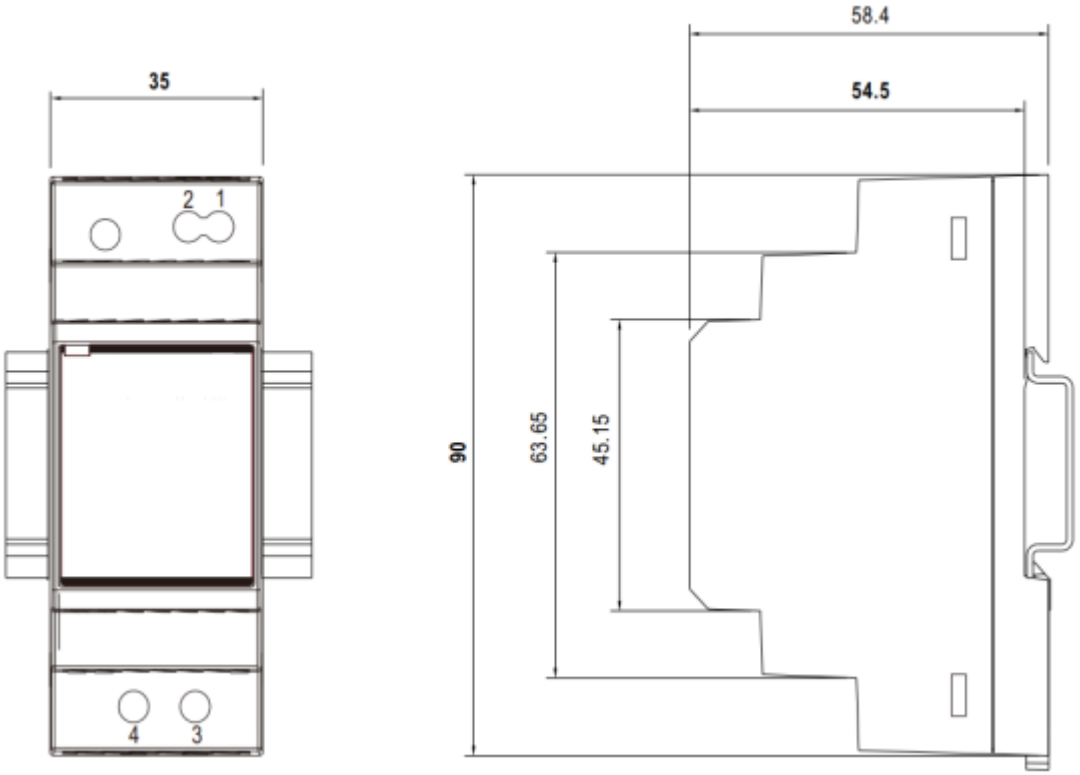
35
2
1
4
3
58.4
54.5
90
63.65
45.15