



RDC Charger

User manual




Robotina d.o.o.
OIC-Hrpelje 38 Hrpelje
SI-6240 Kozina
Slovenia

Table of Contents

CAD-232-A2-IQ	5
<i>Highlights & Features</i>	5
<i>Technical specification</i>	5
<i>Wiring</i>	5

CAD-232-A2-IQ

BTMS Communication converter

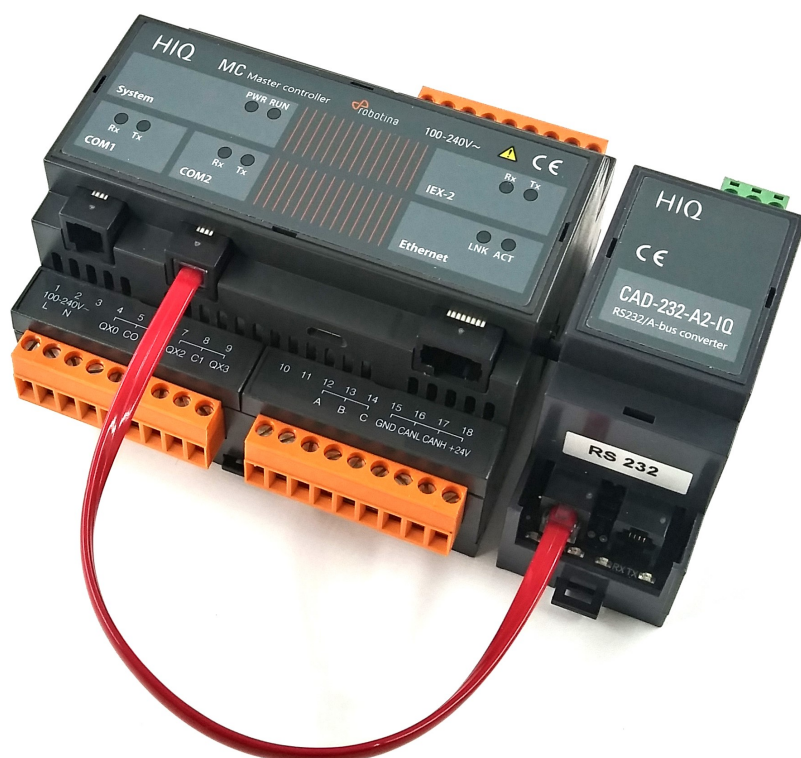

Order code:	CAD-232-A2-IQ
Mounting:	DIN rail, 2M, 36 mm
Dimensions:	58×108×36 mm

Highlights & Features

- RS-232 to RS-485 converter, RJ9 to terminals
- Galvanic isolation: power supply/232 to 485

Technical specification

Power supply	Nominal	24 VDC from IEX bus
Power consumption	Typical	1.200 mA

Wiring