



# RDC Charger

## User manual



**Robotina d.o.o.**  
OIC-Hrpelje 38 Hrpelje  
SI-6240 Kozina  
Slovenia



# Table of Contents

**BM-AG** ..... 5  
*Highlights & Features* ..... 5  
*HW Technical specification* ..... 6  
*Wiring* ..... 7



# BM-AG

## BTMS IOT Agregator




Order code:	<b>BM-AG</b>
Mounting:	DIN rail, 31 mm
Dimensions:	31 x 125 x 100 mm

## Highlights & Features

- It logically combines several BM-GWs into one system
- Overview of the entire Data Center via a single web interface

## HW Technical specification

<b>Power supply:</b>	12 to 24 VDC, 1.39-0.72A	
<b>Construction:</b>	Extruded aluminum and heavy-duty steel, IP30	
<b>CPU:</b>	Intel® Celeron® N3350 2C @1.1 GHz, TDP: 6W	
<b>System Memory:</b>	1 x DDR3L-1866 SO-DIMM 4 GB	
<b>Storage:</b>	128 GB SSD	
<b>System I/O Outlet:</b>	Serial 1 x DB9 RS-232/422/485	
	Display 1 x VGA	
	Ethernet 2 x RJ-45 isolated* 10/100/1000 Mbps	
	DIO 1 x DB9 8-bit programmable DIO	
	LTE Cat 4 Quectel EG25-G Mini PCIe	
<b>Working temp.:</b>	-20°C to +70°C (-4°F to +158°F)	
<b>Humidity:</b>	0% to 95%	
<b>Vibration Endurance:</b>	2 Gms with storage (5 to 500Hz, X/Y/Z direction; random, operating)	
<b>Mounting:</b>	DIN rail, wall	
<b>Weight (net/gross):</b>	0.3 kg (0.67 lb)/0.45 kg (0.99 lb)	
<b>Dimensions:</b>	height	125 mm
	width	31 mm
	depth	100 mm

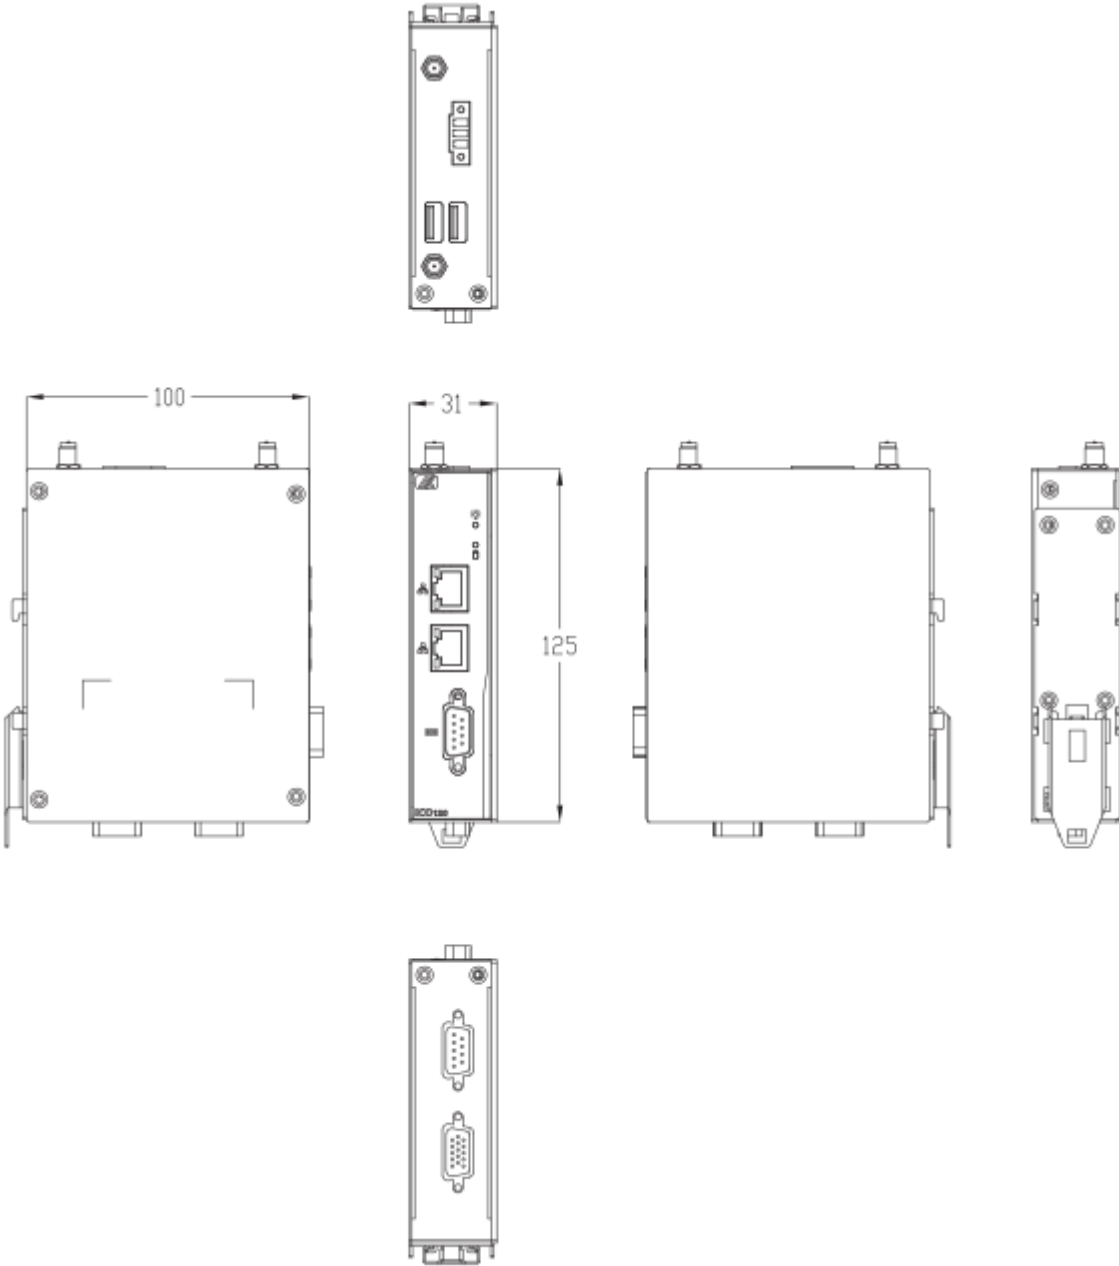

### Wiring

