Robotina d.o.o.
OIC Hrpelje 38
SI-6240 Kozina
Slovenia

1. Room Panel

The room panel is the main interface for guest interaction inside the room, enabling control of comfort functions and room status.

It provides centralized control of HVAC, lighting, and service functions, while also serving as a communication interface between the guest and hotel staff.

---

2. Idle Screen

The idle screen is displayed when the panel is not actively used.

It has two modes:

- **Day mode** – displays hotel branding and a QR code for quick access to the guest web application
- **Night / Low-light mode** – reduced brightness screen with minimal interaction (touch to activate)

The QR code allows guests to control room functions via their mobile device without downloading an application.

Day time	Night / Low-light
	

HIQ Hotel
Where Hospitality Meets Innovation

---


3. Main screen



4. Door-bell screen

Door-bell screen is activated when door-bell button on corridor panel is pressed.

When the door-bell is activated, the beeper beeps briefly.

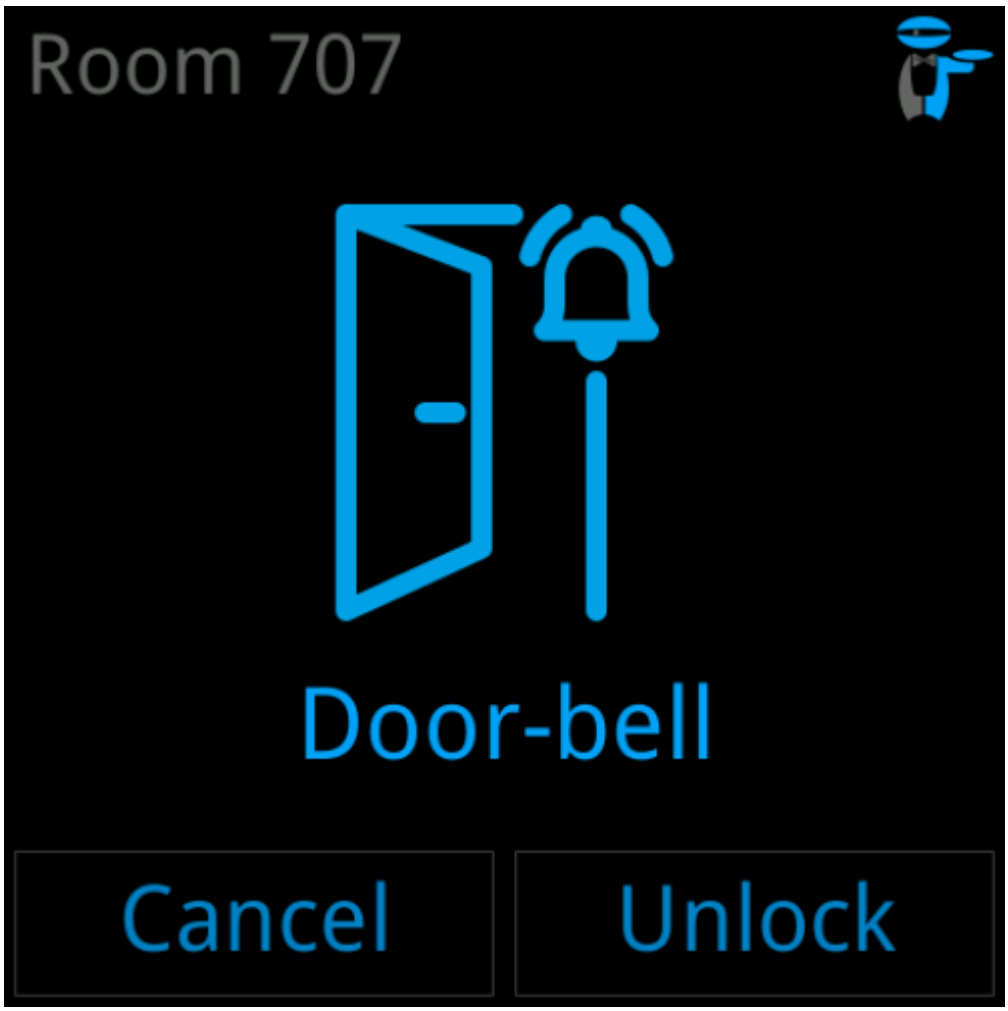

1	Close door-bell screen
2	Unlock door

5. SOS screen

SOS screen is activated when an SOS pull-switch is activated.

During SOS panel periodically beeps.



1	Dismiss off SOS alarm

6. Fire-alert screen

Fire alert screen is activated when temperature rise is abnormal. It can be activated also externally (from fire control center, reception, ...).

During Fire alert panel periodically beeps.

Fire alert cannot be dismissed from in-room panel.


Room 707
Fire alert
Please remain calm and
evacuate immediately
using designated exits