

# Introduction

**Up to 22kW of charging power** - enough to charge electric vehicle for distance of 100km in 45 minutes (calculation made for consumption of 16kWh per 100km)

**Modern design with IP54 & IK10 standard** - suitable for indoor and outdoor use as well as customable charger colours

**Coloured LED light indicates charging status** - different colour for various charger states **Secure charging with remote locking option** - use RFID card or QR code to unlock and start charging process

OCCP 1.6 communication supported Eco charging

- Save by charging (eco charging) during off-peak hours
- Charge with surplus energy
- Priority charging at the highest possible power

Long range wireless power meters for installation without cabling - easy installation & monitoring of the energy consumption

Fully compliant with IEC 61851




RDC Charger does not require connection to internet for operation!


# **RDC Charger & HEMS**

### **Home Energy Management System (HEMS):**

- Monitoring electricity flows at home (consumption, production, and storage)
- Control and manage devices (producers, consumers, prosumers)
- Dynamic Load Management (DLM) keeps consumption power below grid fuses
- Control up to 8 RDC Chargers (EV fleet)
- Provide relevant information and help understanding energy flow
- Minimize cost of electrical energy

(c) Robotina d.o.o.

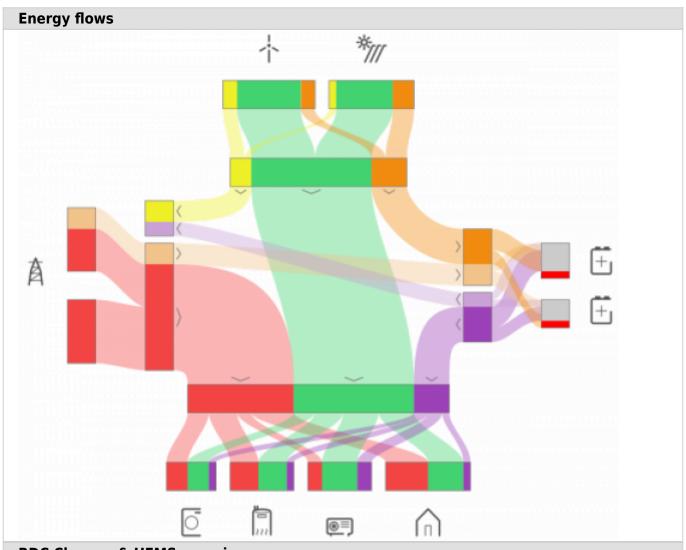

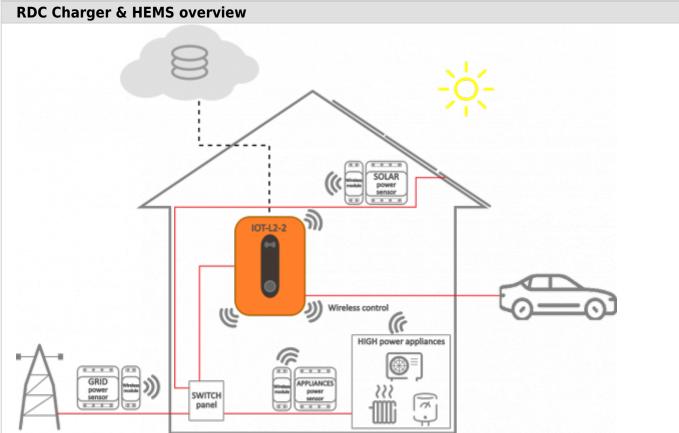


(c) Robotina d.o.o. 2/5

#### Note:

• IOT-L2-2 linker can be installed as external unit or is integrated into the RDC Charger.

### **RDC Charger & EV fleet**


- Control up to 8 RDC Chargers (EV fleet)
- Suitable for multi-apartment buildings, hotels, etc.
- Only one charger is master, others are slave
- Master does optimal operation (Dynamic Load Management) of EV fleet within the building

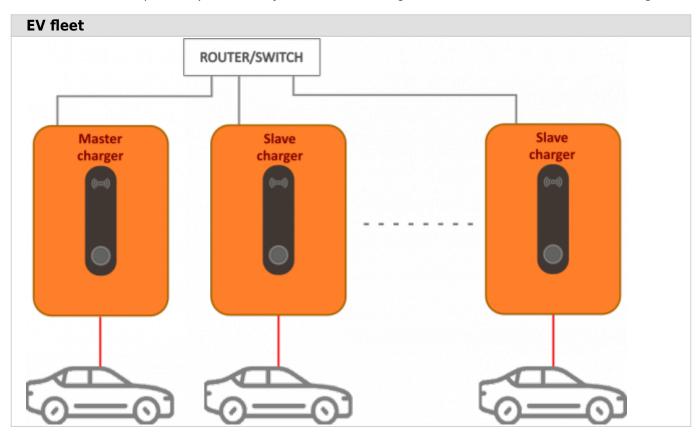

# **Operation**

- If EVSE is enabled and not locked, charging starts automatically as soon as vehicle is connected with power cable.
  - Otherwise, enable EVSE with **short press** on button, by application or use RFID/MIFARE card /OR code.
- short press button toggle enable/pause charging
- long press button toggle priority/eco charging
- LED indicator for charging status

(c) Robotina d.o.o.

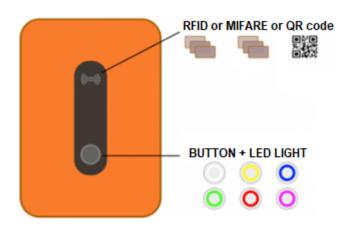

### RFID, MIFARE or QR

Unlock EVSE and toggle enable/pause charging

#### **LOCKED**

- EVSE is locked on software level
- charging is activated by RFID, MIFARE card /QR code or by application

### **ECO CHARGING**

- Allows charging with lower power
- Charging at low tariff only (depending on tariff table settings)
- Charging by surplus energy

### **PRIORITY CHARGING**

- Utilize all available power to charge as fast as possible
- Any eco charging settings are ignored
- In case of Dynamic load management EVSE(s) with Priority charging will be limited last

LED indicator	On	Blinking
	EV is not connected, EVSE is enabled	EV is not connected, EVSE is paused
	EV is connected, EVSE is enabled, not charging	EV is connected, EVSE is paused
0	Charging	1
	Charging ended	1
0	1	Error
	1	Locked
0	1	Priority charging
00	1	Priority charging is paused

(c) Robotina d.o.o. 4/5

LED indicator	On	Blinking
00	1	Priority charging is ended

(c) Robotina d.o.o. 5/5