

# Introduction

**Up to 220kW of charging power** - enough to charge electric vehicle for distance of 100km in 45 minutes (calculation made for consumption of 16kWh per 100km)

**Modern design with IP54 & IK10 standard** - suitable for indoor and outdoor use as well as customable charger colours

**Coloured LED light indicates charging status** - different colour for various charger states **Secure charging with remote locking option** - use RFID card or QR code to unlock and start charging process

OCPP 1.6 communication supported Eco charging

- Save by charging (eco charging) during off-peak hours
- Charge with surplus energy
- Priority charging at the highest possible power

Long range wireless power meters for installation without cabling - easy installation & monitoring of the energy consumption

Fully compliant with IEC 61851




RDC Charger does not require connection to internet for operation!


# **RDC Charger & HEMS**

### **Home Energy Management System (HEMS):**

- Monitoring electricity flows at home (consumption, production, and storage)
- Control and manage devices (producers, consumers, prosumers)
- Dynamic Load Management (DLM) keeps consumption power below grid fuses
- Control up to 8 RDC Chargers (EV fleet)
- Provide relevant information and help understanding energy flow
- Minimize cost of electrical energy

(c) Robotina d.o.o.

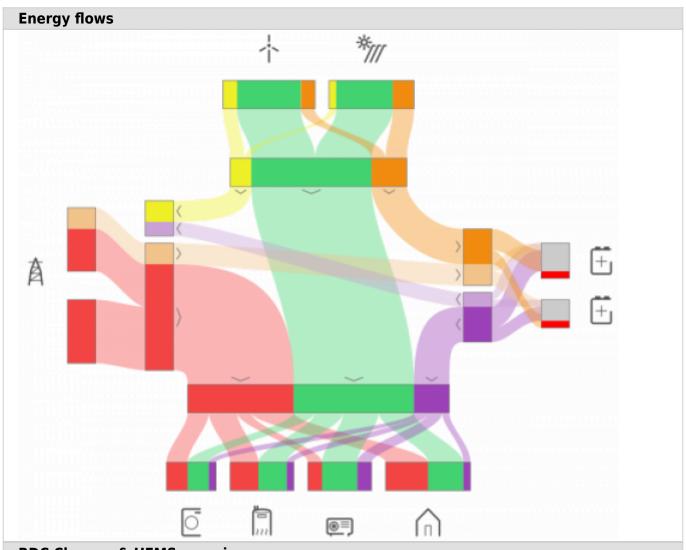

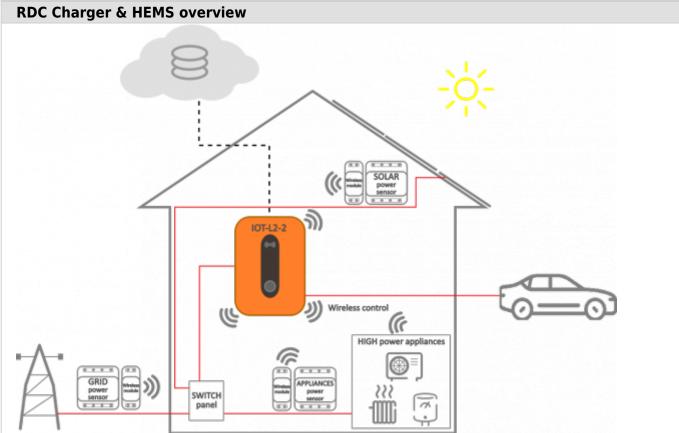


(c) Robotina d.o.o. 2/5

#### Note:

• IOT-L2-2 linker can be installed as external unit or is integrated into the RDC Charger.

### **RDC Charger & EV fleet**


- Control up to 8 RDC Chargers (EV fleet)
- Suitable for multi-apartment buildings, hotels, etc.
- Only one charger is master, others are slave
- Master does optimal operation (Dynamic Load Management) of EV fleet within the building

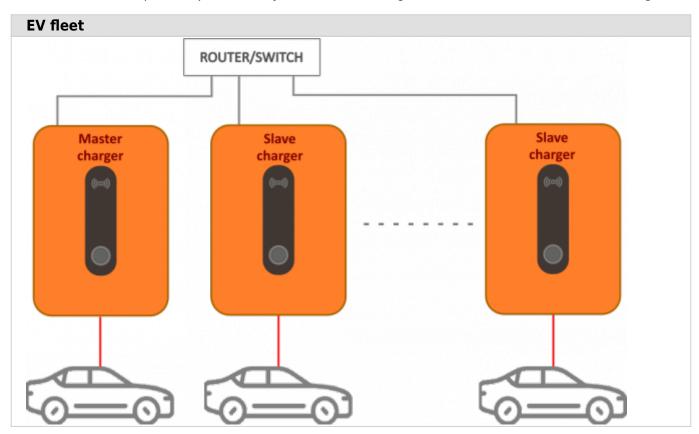

# **Operation**

- If EVSE is enabled and not locked, charging starts automatically as soon as vehicle is connected with power cable.
  - Otherwise, enable EVSE with **short press** on button, by application or use RFID/MIFARE card /OR code.
- short press button toggle enable/pause charging
- long press button toggle priority/eco charging
- LED indicator for charging status

(c) Robotina d.o.o.

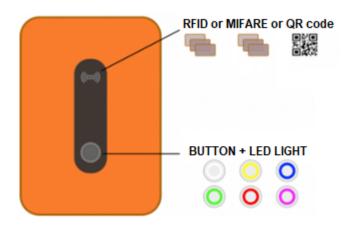

### RFID, MIFARE or QR

Unlock EVSE and toggle enable/pause charging

### **AUTHORIZATION REQUIRED**

- EVSE need authorization to start charging
- charging is activated by RFID, MIFARE card /QR code or by application

### **ECO CHARGING**

- Allows charging with lower power
- Charging at low tariff only (depending on tariff table settings)
- Charging by surplus energy

### **PRIORITY CHARGING**

- Utilize all available power to charge as fast as possible
- Any eco charging settings are ignored
- In case of Dynamic load management EVSE(s) with Priority charging will be limited last

(c) Robotina d.o.o. 4/5

LED indicator	On	Blinking
0	Available	Available, authorization required
0	Preparing (EV is not connected, authorization done) or suspended by DLM	Preparing or finishing (EV is connected, authorization required)
0	Charging	1
00		Charging ended or suspended by EV
0		Priority charging
00		Priority charging is suspended
00		Reserved
00	/	Reserved, preparing (EV is connected)
0	1	Faulted (error) or unavailable

(c) Robotina d.o.o. 5/5