

RDX Charger



Description	Order Code
RDX Charger with type 2 cable and RFID card reader	RDX-RF
RDX Charger with type 2 cable, RFID reader and RCD AC	RDX-RF-R
RDX Charger with type 2 cable, RFID reader and IOT Linker	RDX-RF-I
RDX Charger with type 2 cable, RFID reader, RCD AC and IOT linker	RDX-RF-RI
RDX Charger with type 2 cable and QR code reader	RDX-QR
RDX Charger with type 2 cable, QR code reader and RCD AC	RDX-QR-R
RDX Charger with type 2 cable, QR code reader and IOT Linker	RDX-QR-I
RDX Charger with type 2 cable, QR code reader, RCD AC and IOT linker	RDX-QR-RI

Features

- Up to 22kW of charging power
- Modern design with IP54 & IK10 standard
- Suitable for indoor and outdoor use
- Coloured LED light indicates charging status
- Easy operability with one button on housing
- Monitor & control on application

(c) Robotina d.o.o.


- Compatible with 3rd party software
- Secure charger with remote locking option
- Save by charging (economy charging) during off-peak hours
- Charge with surplus energy
- Priority charging at the highest possible power
- Dynamic load balancing keeps consumption power below max allowed (protect grid fuse/s)
- Manage charging of electric vehicles (EV fleet)
- Remote control of key consumers (heat pump, battery storage system...)
- 6mA DC residual current, overvoltage and undervoltage protection
- 30mA AC residual current
- RFID or QR access control
- Long range wireless power meters for installation without cabling
- Fully compliant with IEC 61851

(c) Robotina d.o.o.

Technical specifications

Nominal voltage	1x230Vac 50/60Hz, 3x230/400Vac 50/60Hz
Maximum current	1x32A, 3x32A
Maximum charging power	22kW
Connector	Type2, 5m cable
Network connection	Ethernet 100M RJ45
	4G LTE (option)
Ingress protection	IP54
Impact resistance	IK10
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to + 70°C
RCD (residual-current device)	DC, 6mA
	AC, 30mA (option)
Standards	IEC 61851

Dimensions

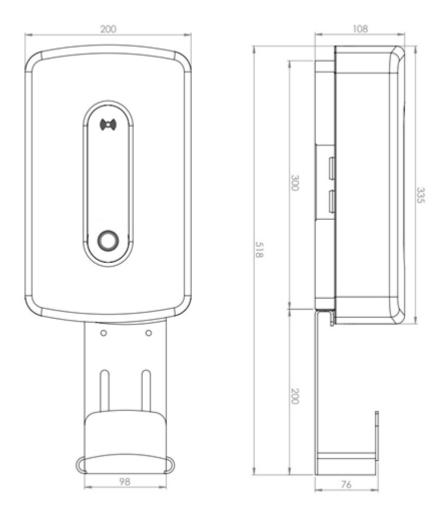


(c) Robotina d.o.o. 3/4

Cable holder mounting options

It can be installed directly on the RDX Charger



It can be installed independently on the wall



(c) Robotina d.o.o. 4/4