

RDC Charger



Description	Order Code
Robotina Dynamic Charger with type 2 cable and QR Code (digital key) reader. Modbus TCP/IP connectivity	RDC-QR
Robotina Dynamic Charger with type 2 cable and standard RFID reader. Modbus TCP/IP connectivity	RDC-RF
Robotina Dynamic Charger with type 2 cable and MIFARE/RFID reader. Modbus TCP/IP connectivity	RDC-MI
Robotina Dynamic Charger with type 2 cable and QR Code (digital key) reader. Modbus TCP/IP connectivity. Built in residual current device	RDC-QR-R
Robotina Dynamic Charger with type 2 cable and standard RFID reader. Modbus TCP/IP connectivity. Built in residual current device	RDC-RF-R
Robotina Dynamic Charger with type 2 cable and MIFARE/RFID reader. Modbus TCP/IP connectivity. Built in residual current device	RDC-MI-R
Robotina Dynamic Charger with type 2 cable and QR Code (digital key) reader and IOT linker for Cloud connectivity. Modbus TCP/IP connectivity.	RDC-QR-I
Robotina Dynamic Charger with type 2 cable and standard RFID reader and IOT linker for Cloud connectivity. Modbus TCP/IP connectivity.	RDC-RF-I

Robotina Dynamic Charger with type 2 cable and MIFARE/RFID reader and IOT linker for Cloud connectivity. Modbus TCP/IP connectivity.	RDC-MI-I
Robotina Dynamic Charger with type 2 cable and QR Code (digital key) reader. Modbus TCP/IP connectivity. Built in residual current device and IOT linker for Cloud connectivity.	RDC-QR-RI
Robotina Dynamic Charger with type 2 cable and standard RFID reader. Modbus TCP/IP connectivity. Built in residual current device and IOT linker for Cloud connectivity.	RDC-RF-RI
Robotina Dynamic Charger with type 2 cable and MIFARE/RFID reader. Modbus TCP/IP connectivity. Built in residual current device and IOT linker for Cloud connectivity.	RDC-MI-RI


Features

- • **Up to 22kW of charging power Enough to charge electric vehicle for distance of 100km in 45 minutes (calculation made for consumption of 16kWh per 100km)**
- • **Modern and simple design With IP54 & IK10 standard suitable for indoor and outdoor use. Customable colours of the Charger enclosure.**
- • **Coloured LED light for charging status Different color or color combination has a different meaning. You can easily see the status of the charger with the color of the LED light.**
- **Coloured LED light indicates charging status**
- **Easy operability with one button on housing**
- **Monitor & control on application**
- **Compatible with 3rd party software**
- **Secure charger with remote locking option**
- **Save by charging (economy charging) during off-peak hours**
- **Charge with surplus energy**
- **Priority charging at the highest possible power**
- **Dynamic load balancing keeps consumption power below max allowed (protect grid fuse/s)**
- **Manage charging of electric vehicles (EV fleet)**
- **Remote control of key consumers (heat pump, battery storage system...)**
- **6mA DC residual current, overvoltage and undervoltage protection**
- **30mA AC residual current**
- **RFID or QR access control**
- **Long range wireless power meters for installation without cabling**
- **Fully compliant with IEC 61851**

Technical specifications

Nominal voltage	1x230Vac 50/60Hz, 3x230/400Vac 50/60Hz
Maximum current	1x32A, 3x32A
Maximum charging power	22kW
Connector	Type2, 5m cable
Network connection	Ethernet 100M RJ45
	4G LTE (option)
Ingress protection	IP54
Impact resistance	IK10
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to + 70°C
RCD (residual-current device)	DC, 6mA
	AC, 30mA (option)
Standards	IEC 61851

Dimensions

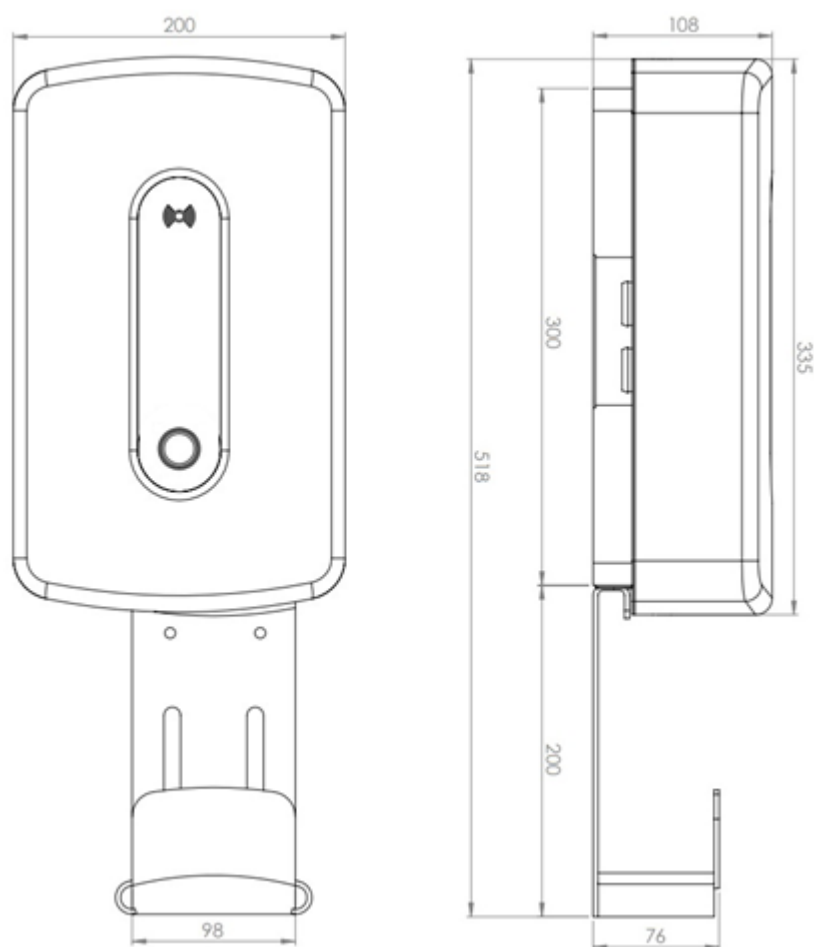

Cable holder mounting options

It can be installed directly on the RDX Charger



It can be installed independently on the wall

