

COM-485

Serial communication module IEX - RS485

| | |
|---------------|----------------|
| Model number: | COM-485 |
| Mounting: | DIN rail |




Features

- IEX-2 protocol converter
- RS-485
- galvanically isolated

Technical specification

| | |
|----------------------------|---|
| Power supply | 24V (18..28V), 40mA |
| Galvanic isolation | 1kV between internal circuit and com port |
| Operating conditions | 0..50°C, 0..85% rh non-condensing |
| Degree of protection | IP20 |
| Weight | 120g |
| Level of ambient pollution | 2 |
| Standards | EN 61010-1, EN 61010-2-201, EN 61131-2 |

Terminals

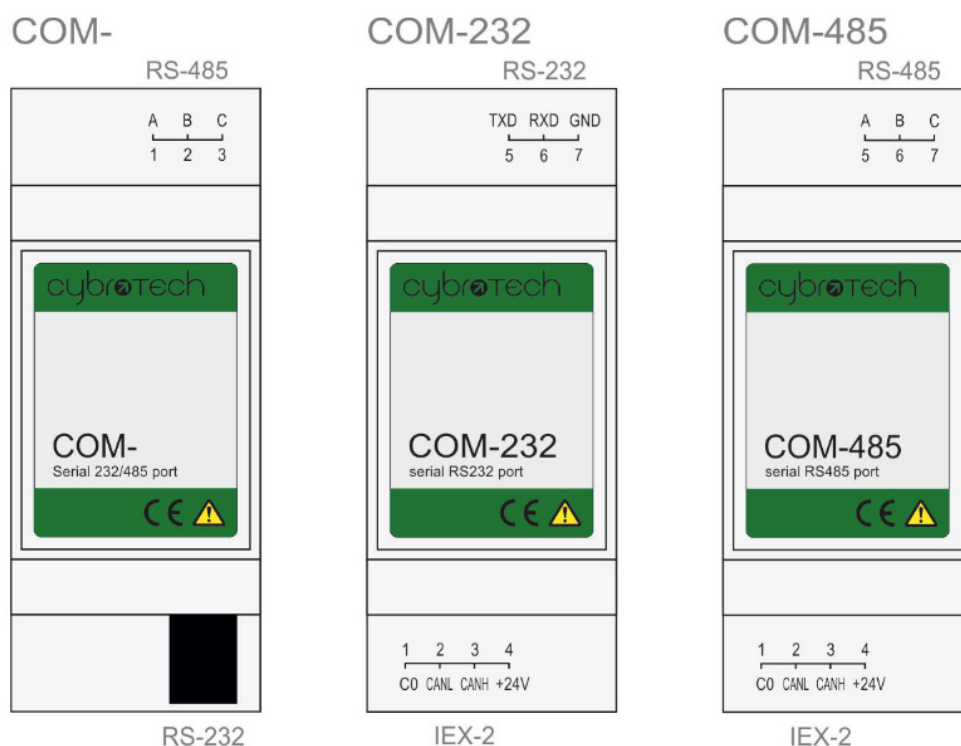

| | | | |
|---------------------------|------------------------------------|-----------------------------|-----------------------------|
| IEX-2 RS-232 RS-485 | RJ9 left+right RJ9 terminals | terminals terminals - | terminals - terminals |
|---------------------------|------------------------------------|-----------------------------|-----------------------------|

Dimensions

