

SC-4T-IQ

touch screen 4 scene controller



Model number:	SC-4T-IQ
Mounting:	on-wall, 3M rectangular box
Dimensions:	122×80×23mm

Applications

- Scene controller
- Individual light / dimmer button
- Blinds up/down button
- IR remote controller input

Features

- configurable panel layout



-
- quick set any lights and/or blinds to predefined value
- easy scene memorization
- configurable button action:
 - on/off
 - dimmer push button (on/off and 0..100%)
 - blinds up/down
 - scene
- IR remote commands receiver

General description

SC-4T-IQ is on wall compact intelligent scene controller with up to 4 configurable touch buttons. Scene controller provides memorizing and selection of up to 4 scenes. Scene state is indicated by LED. Scene can be any combination of lights and blinds controlled through HIQ modules. SC-4T-IQ buttons can be configured also as toggle button for on/off output, dimmer button or up/down button for blinds control. Built in IR receiver allows scene set with any RC5/36kHz IR remote controller.


Technical specification

IR remote receiver:	RC5, 36kHz
Power supply:	24V/25mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c

Terminals

IEX2 BUS	+24V	IEX2 bus
	CANH	
	CANL	
	GND	

Terminals

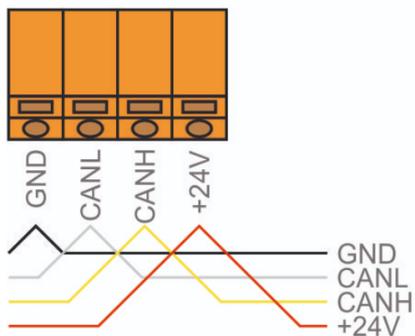

Mounting: rectangular box 3M

