

SC-4T-IQ

touch screen 4 scene controller



| | |
|---------------|-----------------------------|
| Model number: | SC-4T-IQ |
| Mounting: | on-wall, 3M rectangular box |
| Dimensions: | 122×80×23mm |

Applications

- Scene controller
- Individual light / dimmer button
- Blinds up/down button
- IR remote controller input

Features

- configurable panel layout



-
- quick set any lights and/or blinds to predefined value
- easy scene memorization
- configurable button action:
 - on/off
 - dimmer push button (on/off and 0..100%)
 - blinds up/down
 - scene
- IR remote commands receiver

General description

SC-4T-IQ is on wall compact intelligent scene controller with up to 4 configurable touch buttons. Scene controller provides memorizing and selection of up to 4 scenes. Scene state is indicated by LED. Scene can be any combination of lights and blinds controlled through HIQ modules. SC-4T-IQ buttons can be configured also as toggle button for on/off output, dimmer button or up/down button for blinds control. Built in IR receiver allows scene set with any RC5/36kHz IR remote controller.


Technical specification

| | |
|------------------------|------------|
| IR remote receiver: | RC5, 36kHz |
| Power supply: | 24V/25mA |
| Ingress protection: | IP20 |
| Operating temperature: | 0..45°C |
| Storage temperature: | -20..75°C |
| Relative humidity: | 0..95% n/c |

Terminals

| | | |
|----------|-------------|----------|
| IEX2 BUS | +24V | IEX2 bus |
| | CANH | |
| | CANL | |
| | GND | |

Terminals

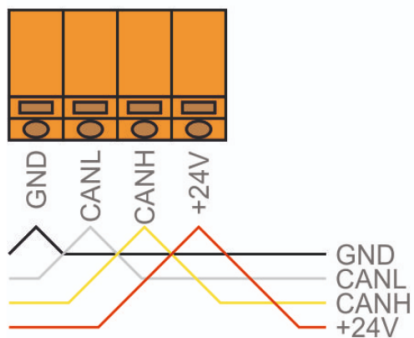

Mounting: rectangular box 3M

